




# SeamTek™ N<sup>2</sup> UV Cured Type 2Q Quartz Flooring

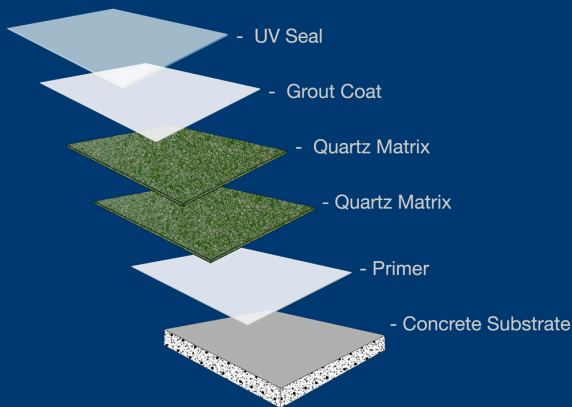

## Life Science Products

124 Speer Road, Chestertown, MD 21620  
www.lspinc.com | 800-638-9874 | info@lspinc.com

© 2022 Life Science Products, Inc.

**Install LSP's World Class  
UV Sealed Floor**  
in the Morning,  
Use Your New Floor  
the Same Day.  
**No Odor, No VOCs, No HAPs**  
Completely Sealed,  
Environmentally  
& Personnel Friendly



## SeamTek™ N2 UV Cured Type 2Q Flooring Features:

- Immediately Available to Occupy
- One of the Hardest, Chemical Resistant, Seal Coats Available
- Superior Stain Resistance
- No Lingering Odor like MMA
- Extremely Long Lasting
- Clear and No Ambering
- 100% Solids – Solvent Free
- No VOCs and No HAPs
- LEED Compliant
- High Taber Resistance

## SeamTek™ N<sup>2</sup> UV Cured Type 2Q Flooring General Description:

SeamTek™ Type 2Q N2 Flooring is composed of epoxy, urethane, and vinyl ester resins. They are styrene free and very environmentally friendly. The system uses UV Lights to cure within seconds at such an advanced level to allow the use of the floor immediately. So completely cured and sealed, it accepts full weight loads and chemical exposure with no wait time. SeamTek™ N2 Type 2Q uses quartz aggregate to provide color and random pattern. The system has excellent thermal properties and impact resistance.

SeamTek™ Type 2Q N2 flooring is recommended for Cage Wash or high moisture areas, as quartz aggregate can provide adequate non-skid properties in high moisture areas.

LSP N2 UV systems provides similar long term benefits as MMA floors without their typical odor issues.

## Details and Properties

**Color** - Resins and UV Coat are Clear. Floor color and pattern determined by quartz colors.

**Installed Thickness** - Nominal 110 mils.

**Resin Storage Temperature** - 60° - 80° Fahrenheit

**Epoxy Resins** - 100% Solids

**System Type** - Quartz Broadcast

**Mix Ratio** - 2:1 (Resin to Hardener)

**Agitate Time** - 2 Minutes then scrape interior of mixing container and mix 1 more minute.

**Sub-Floor Moisture Vapor Transmission** - Not to exceed 2.9 Pounds of water per 24 hours per 1,000 sq.ft. as determined by test ASTM F-1869. (Calcium Chloride Test)

### Minimum Test Values Required:

ASTM C-579 Compressive Strength - 17,000 psi

ASTM C-307 Tensile Strength - 13,000 psi

ASTM C-580 Flexural Strength - 25,000 psi

ASTM D-635 Flexural Modulus -  $2.5 \times 10^5$

ASTM D-635 Flammability - Self Extinguishing

## Chemical Resistance:

Acetic Acid, 10% - SS  
Acetone - SS  
Aluminum Chloride - E  
Ammonium Hydroxide, 28% - SS  
Calcium Chloride, 30% - E  
Calcium Hypochlorite 30% - E  
Chlorine (Wet or Dry) - SS  
Clorox Full Strength - SS  
Diethyl Phthalate - E  
Formaldehyde, 37% - SS  
Formic Acid, 10% - SS  
Gasoline - E  
Glycerin - E  
Hydrochloric Acid, 10% - E  
Hydrochloric Acid, 37% - G  
Hydrogen Peroxide, 6% - SS  
Isopropyl Alcohol - SS  
Lactic Acid, < 20% - E  
Mineral Spirits - E  
Nitric Acid, 10% - E  
Phosphoric Acid, 50% - E  
Potassium Hydroxide - E  
Sodium Hydroxide, 50% - E  
Sodium Hypochlorite, 15% - SS  
Sulfuric Acid, 10% - E  
Sulfuric Acid, 30% - E  
Trichloroethylene - G  
Trisodium Phosphate - E  
Urea - E  
Urine - E

**E = Excellent (Maintains Resistance up to 7 days)**

**G = Good (Maintains Resistance up to 25 hours)**

**SS = Splash & Spill Requiring Immediate Removal**

*(The above is a generic listing of chemical resistance and may not be accurate for all commercial solutions. LSP recommends testing all new chemicals before adding to cleaning protocols.)*

## Life Science Products have been in demand by these and other highly respected institutions:

Bristol Meyer Squib | Children's Mercy | Cleveland Clinic | CalTech Univ. | Dana Farber | Duke University  
Emory University | F.D.A. | Harvard University | M.D. Anderson | NIH | Novartis | Northwestern University  
Ohio State U. | Pfizer | Princeton University | Regeneron | University of North Carolina | Yale University